






**Coaxial: 1/4" Diameter
.050 [1.3] Dia. Conductor**

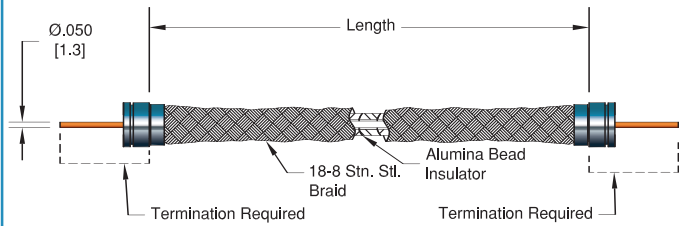


Termination A – Coaxial

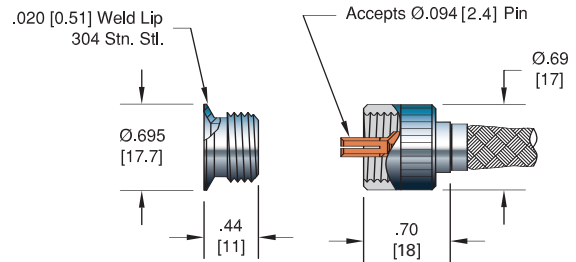


Termination B – Contact




Termination C – In-Line



Termination – BNC & MHV



1/4" Cable Splice

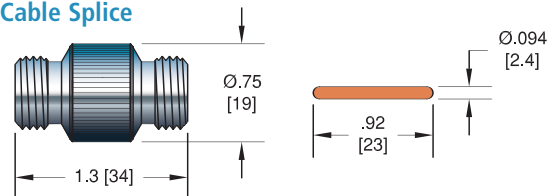

Coaxial Cables
1/4" Diameter



| VOLTAGE DC | TERMINATION | | LENGTH | CONDUCTOR AMPS | CONDUCTOR MATERIAL | TEMPERATURE °C | | MAGNETIC MATERIALS | PART NUMBER |
|------------|-------------|-------|--------|----------------|--------------------|----------------|-----|--------------------|-------------|
| | END 1 | END 2 | | | | MIN | MAX | | |
| 3 kV | A | A | 12" | 25 | Zirconium Copper | -269 | 200 | No | 18681-12-AA |
| 3 kV | A | B | 12" | 25 | Zirconium Copper | -269 | 200 | No | 18681-12-AB |
| 3 kV | A | C | 12" | 25 | Zirconium Copper | -269 | 200 | No | 18681-12-AC |
| 3 kV | A | BNC | 12" | 25 | Zirconium Copper | -269 | 200 | No | 18681-12-AE |
| 3 kV | A | MHV | 12" | 25 | Zirconium Copper | -269 | 200 | No | 18681-12-AF |
| 3 kV | B | B | 12" | 25 | Zirconium Copper | -269 | 200 | No | 18681-12-BB |
| 3 kV | B | C | 12" | 25 | Zirconium Copper | -269 | 200 | No | 18681-12-BC |
| 3 kV | C | C | 12" | 25 | Zirconium Copper | -269 | 350 | No | 18681-12-CC |
| 3 kV | BNC | BNC | 12" | 25 | Zirconium Copper | -269 | 350 | No | 18681-12-EE |
| 3 kV | MHV | MHV | 12" | 25 | Zirconium Copper | -269 | 350 | No | 18681-12-FF |
| 3 kV | A | A | 24" | 25 | Zirconium Copper | -269 | 200 | No | 18681-24-AA |
| 3 kV | A | B | 24" | 25 | Zirconium Copper | -269 | 200 | No | 18681-24-AB |
| 3 kV | A | C | 24" | 25 | Zirconium Copper | -269 | 200 | No | 18681-24-AC |
| 3 kV | A | BNC | 24" | 25 | Zirconium Copper | -269 | 200 | No | 18681-24-AE |
| 3 kV | A | MHV | 24" | 25 | Zirconium Copper | -269 | 200 | No | 18681-24-AF |
| 3 kV | B | B | 24" | 25 | Zirconium Copper | -269 | 200 | No | 18681-24-BB |
| 3 kV | B | C | 24" | 25 | Zirconium Copper | -269 | 200 | No | 18681-24-BC |
| 3 kV | C | C | 24" | 25 | Zirconium Copper | -269 | 350 | No | 18681-24-CC |
| 3 kV | BNC | BNC | 24" | 25 | Zirconium Copper | -269 | 350 | No | 18681-24-EE |
| 3 kV | MHV | MHV | 24" | 25 | Zirconium Copper | -269 | 350 | No | 18681-24-FF |
| 3 kV | A | A | 36" | 25 | Zirconium Copper | -269 | 200 | No | 18681-36-AA |
| 3 kV | A | B | 36" | 25 | Zirconium Copper | -269 | 200 | No | 18681-36-AB |
| 3 kV | A | C | 36" | 25 | Zirconium Copper | -269 | 200 | No | 18681-36-AC |
| 3 kV | A | BNC | 36" | 25 | Zirconium Copper | -269 | 200 | No | 18681-36-AE |
| 3 kV | A | MHV | 36" | 25 | Zirconium Copper | -269 | 200 | No | 18681-36-AF |
| 3 kV | B | B | 36" | 25 | Zirconium Copper | -269 | 200 | No | 18681-36-BB |
| 3 kV | B | C | 36" | 25 | Zirconium Copper | -269 | 200 | No | 18681-36-BC |
| 3 kV | C | C | 36" | 25 | Zirconium Copper | -269 | 350 | No | 18681-36-CC |
| 3 kV | BNC | BNC | 36" | 25 | Zirconium Copper | -269 | 350 | No | 18681-36-EE |
| 3 kV | MHV | MHV | 36" | 25 | Zirconium Copper | -269 | 350 | No | 18681-36-FF |

Cable Splice



| SIZE | VOLTAGE DC | CONDUCTOR AMPS | CONDUCTOR MATERIAL | TEMPERATURE °C MIN | TEMPERATURE °C MAX | MAGNETIC MATERIALS | PART NUMBER |
|------|------------|----------------|--------------------|--------------------|--------------------|--------------------|-------------|
| 1/4" | 3 kV | 25 | Copper | -269 | 400 | No | 18728-01-A |