




Microdot

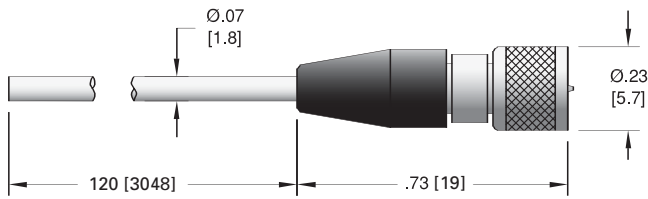


SMB

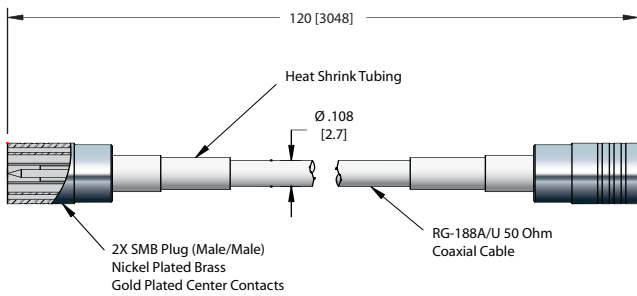


SMA

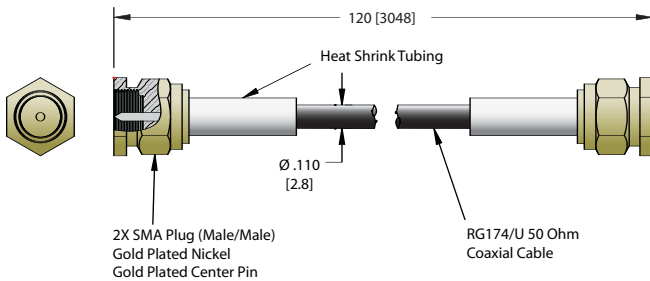


BNC

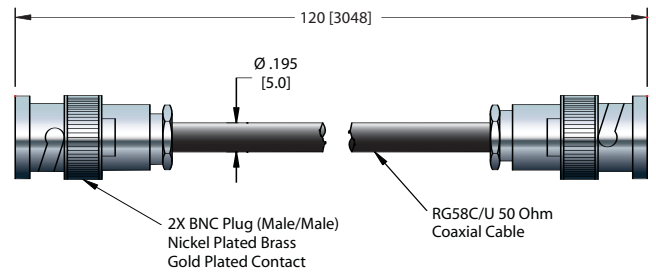


MHV

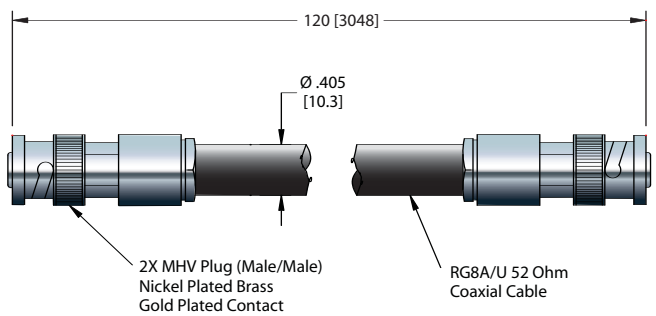

Type N

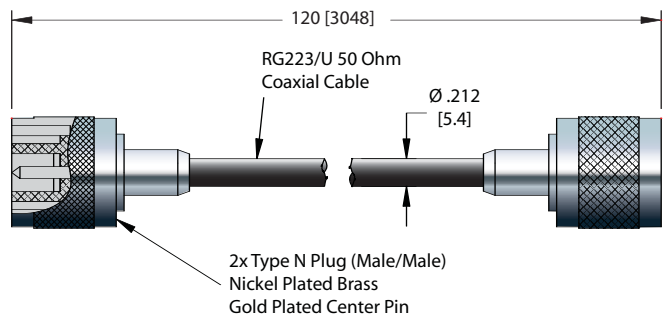

SHV – 5 KV

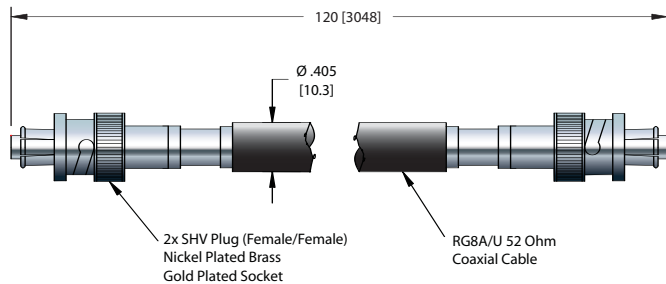



Single Ended
Microdot

TYPE	CABLE	CABLE LENGTH	VOLTAGE DC	CONDUCTOR AMPS	TEMPERATURE °C MIN	TEMPERATURE °C MAX	PART NUMBER
Microdot	RG196A/U	10'	1 kV	2	-65	125	14544-01-A



Double Ended
SMB

50 Ohm SMB	RG188A/U	10'	500 V	2	-70	200	21618-01-A
------------	----------	-----	-------	---	-----	-----	------------



Double Ended
SMA

50 Ohm SMA	RG174/U	10'	500 V	5	-45	75	21617-01-A
------------	---------	-----	-------	---	-----	----	------------



Double Ended
BNC

50 Ohm BNC	RG58C/U	10'	500 V	5	-40	85	18921-01-A
------------	---------	-----	-------	---	-----	----	------------



Double Ended
MHV

52 Ohm MHV	RG8A/U	10'	5 kV	10	-55	85	18921-02-A
------------	--------	-----	------	----	-----	----	------------



Double Ended
Type N

50 Ohm Type N	RG223/U	10'	1.5 kV	5	-40	60	21619-01-A
---------------	---------	-----	--------	---	-----	----	------------



Double Ended
SHV - 5 KV

52 Ohm SHV	RG8A/U	10'	5 kV	10	-55	85	18921-03-A
------------	--------	-----	------	----	-----	----	------------