



MIL-C-5015 Type
Installation: 1" Bolt

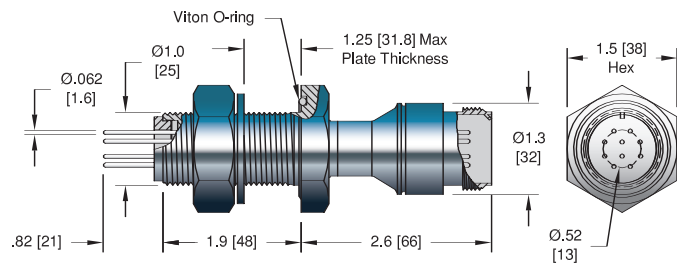

Octal Connector
Installation: 1" Bolt

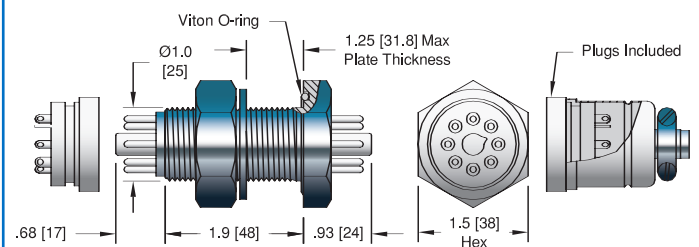

MIL-C-5015 Type Specifications

Materials

- Bolt: 304 Stainless steel
- Pins: Alumel
- Insulation: Alumina ceramic
- Magnetic Materials: Yes

Voltage Rating 700 V DC

Current Rating 7 Amps per pin

Temperature Range -25°C to 205°C

Pressure @ 20°C 200 PSIG (14 Bar)

Octal Connector Specifications

Materials

- Bolt: 304 Stainless steel
- Pins: Alumel
- Insulation: Glass-ceramic
- Magnetic Materials: Yes

Voltage Rating 350 V DC

Current Rating 7 Amps per pin

Temperature Range -25°C to 205°C

Pressure @ 20°C 200 PSIG (14 Bar)

MULTIPIN CONNECTOR



**MIL-C-5015 Type
1" Bolt**

NO. PINS	INSTALLATION	PART NUMBER
10	1" Bolt	15717-01-A

**Octal Connector
1" Bolt**

8	1" Bolt	15730-01-A
---	---------	------------

Air Side Plug

TYPE	VOLTAGE DC	CONDUCTOR AMPS	NO. CONTACTS	DIMENSIONS		PART NUMBER
				H	L	
Air Side	700 V	13	10	1.4 [36]	4.4 [112]	15912-01-A

Contacts

TYPE	MATERIAL	DESCRIPTION	PART NUMBER
0.062 Crimp Contacts	Beryllium Copper	Accepts wire up to 0.050 [1.3]	2044-02-A†
0.062 Crimp Contacts	Nickel Alloy	Accepts wire up to 0.062 [1.6]	0821-01-A
Crimp Tool		For 0.025" – 0.075" Crimp Diameters	2840-05

*Contacts priced and sold in packages of 10. †Shown in photo. See the Accessories section for more information on all accessories.

MULTIPIN CONNECTOR

